



INOVGREEN IP 40

DIMENSIONS OF THE GRID

- 58 x 39 - height 4 cm

GEOMETRIC MODEL

- 9 x 6 eyelets (54 eyelets in one grid)

WEIGHT OF THE GRID

- 4,66 kg/m²

RESISTANCE TO TEMPERATURE

- from -30°C to +80°C

ASSEMBLY METHOD

- using integrated hooks (without using tools)

ENVIRONMENTAL IMPACT

- harmless

BIOLOGICALLY ACTIVE SURFACE

- 90,1 %

STRENGTH ON PRESSURE




- do 1000 t/m² with filling (ITB survey report)

CERTIFICATES / ATTESTS

- TÜV Nord ISO 9001:2015

AVAILABLE COLOURS

- standard: black, green
- on order: gray, brown

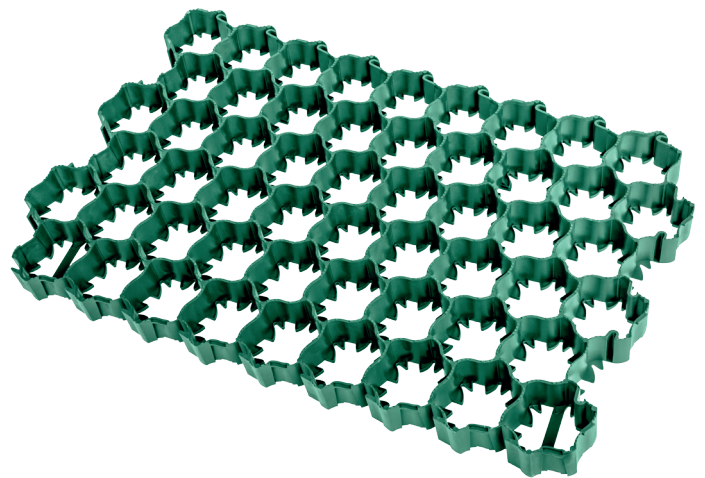

PARKING MARKERS



PPM IP 40 | height: 4 cm | colour: white and yellow

EXEMPLARY APPLICATION

- grass, and gravel parking lots
- access and temporary roads
- drainage ditches
- recreational areas
- camping
- open - air runs for animals
- training grounds
- sports facilities
- parking spaces up to 35 t
- reinforcement of the pond shores
- reinforcement of the ground for agricultural machinery
- helipads
- walking and cycling paths
- garage entries
- zoo
- ground for tent halls
- paths in the garden
- reinforcement of existing lawns
- golf courses
- house surroundings - drainage
- preparation of areas for mass events
- fruit farming
- nursery
- shooting
- reinforcement of slopes
- green roofs